Non-monotonic Reasoning

Pascal Hitzler[†]

Colloquium of the Boole Centre for Research in Informatics
University College Cork, July 2003

Contents

- What is non-monotonic reasoning?
- Non-monotonic reasoning with logic programs.
- A domain-theoretic perspective.

[†]Artificial Intelligence Institute, Dresden University of Technology, Dresden, Germany

What is non-monotonic reasoning?

Inspired by commonsense reasoning.

. . . acting under incomplete knowledge . . .

. . . jumping to conclusions . . .

Tweety is a bird, hence flies.
But you may find out later that it is a penguin . . .

Seek abstract (high-level) knowledge representation and reasoning formalisms suitable for this kind of reasoning.

Different formalisms for NMR ...

Axiomatic aproaches (Makinson; Kraus, Lehmann, Magidor) e.g.

supraclassicality: $\frac{X \vdash \alpha}{X \mid\sim \alpha}$

cautious monotonicity: $\frac{X \mid\sim \alpha \quad X \mid\sim \beta}{X, \alpha \mid\sim \alpha}$ $\left(\text{monotonicity: } \frac{X \vdash \alpha}{X, \beta \vdash \alpha}\right)$

(developed relatively late)

modality for *belief* (Moore's Autoepistemic Logic)

second-order approaches (McCarthy's Circumscription)

Default Logic (Reiter, 1980)

(propositional case, F, G, H formulae)

default: $\frac{F:G}{H}$ "if F, and if G is possible, then H"

Δ set of defaults. E is called a *default extension* of Δ if E is a minimal logically closed theory (set of formulae) satisfying:
whenever $E \models F$ and H is consistent with E, then $H \in E$.

$$\frac{\text{bird} : \neg\text{penguin}}{\text{flies}}$$

NMR with logic programs

Horn program: set of CNF formulae (clauses) $p \vee \neg q_1 \vee \cdots \vee \neg q_n$

written: $p \leftarrow q_1, \ldots, q_n$

Set of *atoms* inferred depends monotonically on program.

procedurally (Prolog): $p \leftarrow r$ infers $\neg p$
after addition of $r \leftarrow$ we infer p

nonmonotonic behaviour of negation

closed world assumption
negation as "(finite) failure to prove it"

Stable models

next step: allow negation in clauses: $p \leftarrow q_1, \ldots, q_n, \neg r_1, \ldots, \neg r_m$.
(*normal* logic program)

Intended semantics approach: what *should* it be? (deviating from Prolog)

Interpret each clause as *default*

$$\frac{q_1 \wedge \cdots \wedge q_n : \neg(r_1 \vee \cdots \vee r_m)}{p}.$$

Default extensions of a program are exactly the (logical closures of the) *stable models* of a program (Gelfond & Lifschitz 1991).

$$\text{flies} \leftarrow \text{bird}, \neg\text{penguin}$$

Stable models: fixed point characterization

Horn program P, I set of atoms (*interpretation*):

$T_P(I) = \{p \mid \exists(p \leftarrow p_1, \ldots, p_n) \in P. \forall i. p_i \in I\}$.

T_P Scott-continuous, monotonic, least fixed point $\mathrm{fix}(T_P) = \bigcup T_P^n(\emptyset)$.

$\mathrm{fix}(T_P)$ is *least model* of P.

normal program P: Set P/I to be the Horn program consisting of all

$p \leftarrow p_1, \ldots, p_n$ generated from all

$p \leftarrow p_1, \ldots, p_n, \neg q_1, \ldots, \neg q_m$ with $\forall i. q_i \notin I$.

Stable models characterized by: $I = \mathrm{fix}(T_{P/I}) \quad (= \mathrm{GL}_P(I))$.

GL_P antitonic (not monotonic in general).

$$\mathrm{flies} \vee \mathrm{penguin} \leftarrow \mathrm{bird}$$

Answer sets

Syntactic extension: $p_1 \vee \cdots \vee p_k \leftarrow q_1 \wedge \cdots \wedge q_m \wedge \neg r_1 \wedge \cdots \wedge \neg r_n$

written: $p_1, \ldots, p_k \leftarrow q_1, \ldots, q_m, \neg r_1, \ldots, \neg r_n$.

I interpretation (set of atoms), P program. P/I defined as before, resulting in program with rules of the form $p_1, \ldots, p_k \leftarrow q_1, \ldots, q_m$.

These have minimal models $\mathrm{Min}(P/I)$.

I *answer set* if $I \in \mathrm{Min}(P/I)$.

Coherent algebraic cpos

(We will take a detour and will come back to NMR later.)

cpo: directed complete partial order with bottom $(D, \sqsubseteq)$

$c \in \mathsf{K}(D)$ (compact) iff $(\forall A \text{ directed})(d \sqsubseteq \bigsqcup A \implies (\exists a \in A) d \sqsubseteq a)$

cpo *algebraic*: $(\forall x)\,(x = \bigsqcup(x\!\downarrow \cap \mathsf{K}(D)))$

Scott topology: base $\{\uparrow c \mid c \in \mathsf{K}(D)\}$

coherent: finite intersections of compact-opens are compact-open

Examples: Finite posets with bottom. Powersets. $\mathbb{T}^\omega$.

Plotkin's $\mathbb{T}^\omega$

blackboard

Smyth powerdomain as ideal completion

$X, Y \subseteq \mathsf{K}(D)$. $X \sqsubseteq^\sharp Y$ iff $(\forall y \in Y)(\exists x \in X)(x \sqsubseteq y)$

Smyth powerdomain of a coherent algebraic cpo: proper ideal completion of the set of all finite subsets of D, ordered by $\sqsubseteq^\sharp$.

Used for modelling nondeterminism in domain theory.

In the following: $(D, \sqsubseteq)$ coherent algebraic domain.

Logic RZ

(Rounds & Zhang, 2001)

clause X: finite subset of $\mathsf{K}(D)$

$w \in D$: $w \models X$ iff $(\exists x \in X)(x \sqsubseteq w)$.

theory T: set of clauses.

$w \models T$ iff $(\forall X \in T)(w \models X)$.

$T \models X$ iff $(\forall w \in D)(w \models T \implies w \models X)$.

Logic RZ

Proof theory: (WLP'02)

$$\frac{}{\{\bot\}}$$

$$\frac{X; \qquad a \in X; \qquad y \sqsubseteq a}{\{y\} \cup (X \setminus \{a\})}$$

$$\frac{X; \qquad y \in \mathsf{K}(D)}{\{y\} \cup X}$$

$$\frac{X_1 \quad X_2; \qquad a_1 \in X_1 \quad a_2 \in X_2}{\mathrm{mub}\{a_1, a_2\} \cup (X_1 \setminus \{a_1\}) \cup (X_2 \setminus \{a_2\})}$$

Logic RZ is compact.

Smyth powerdomain via the logic RZ

(Rounds & Zhang 2001)

The logically closed theories are the ideals under $\sqsubseteq^\sharp$.

Smyth powerdomain: consistent closed theories under set-inclusion.

Relation to Formal Concept Analysis (FCA)

(FCA: tool used in data mining and analysis; Ganter & Wille 1999)

G set of objects; M set of attributes. $C \subseteq G \times M$ *formal context.*

$A \subseteq G$ then $A' = \{m \in M \mid (\forall g \in A)(g, m) \in C\}$.
$B \subseteq M$ then $B' = \{g \in G \mid (\forall m \in B)(g, m) \in C\}$.

Formal concept: Pair (A, B) with $A' = B$, $A = B'$.
Equivalently: All (B', B'') for $B \subseteq M$.

Formal concept lattice:
complete lattice of all concepts ordered by $\supseteq$ in second argument.

Formal Concept Analysis

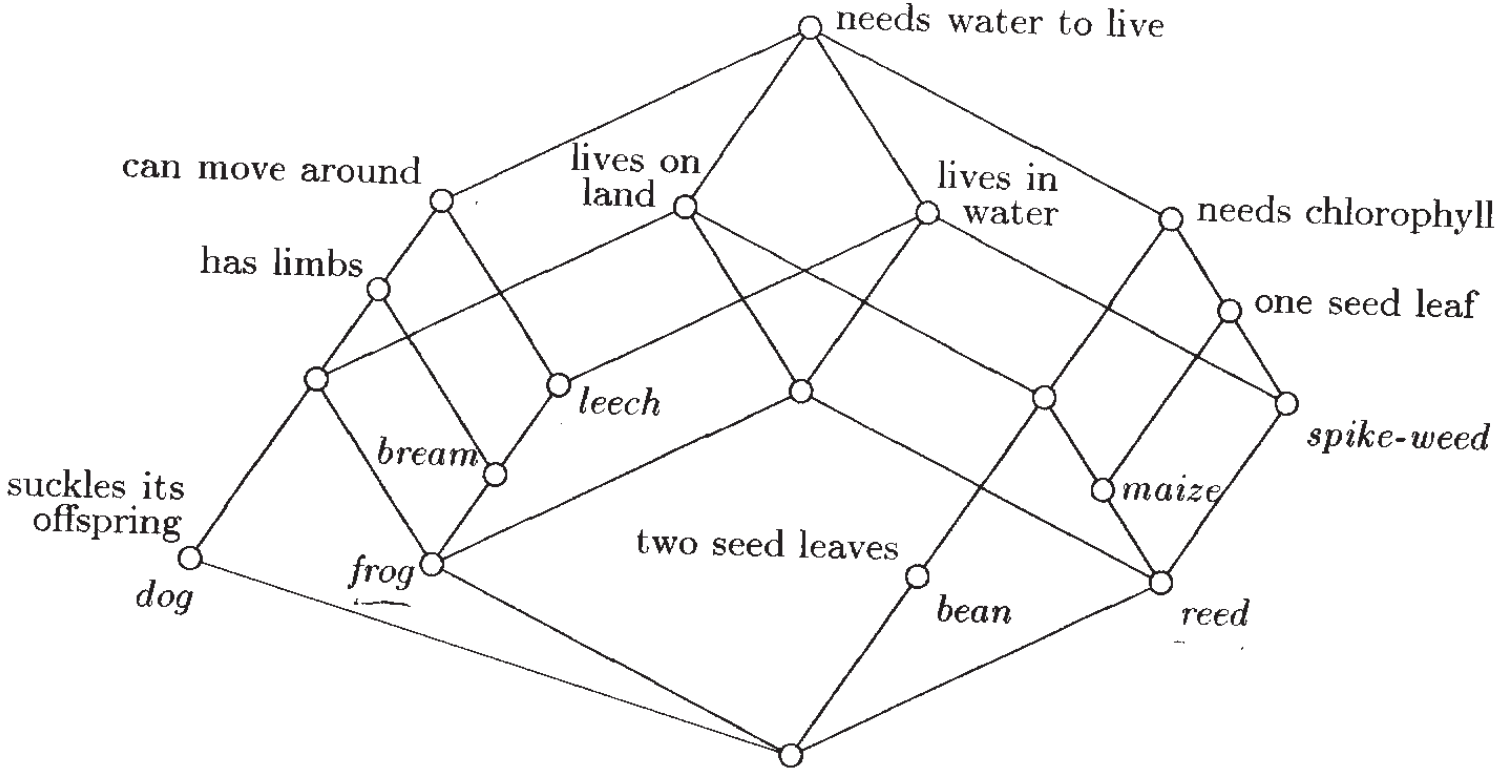

Figure 1.4 Concept lattice for the educational film "Living beings and water".

(source: Ganter & Wille, Formal Concept Analysis, Springer, 1999.)

Relation to Formal Concept Analysis (FCA)

(with Matthias Wendt, ICCS 2003)

Consider subposet D of all $(\{b\}', \{b\}'')$, $b \in M$,
and all $(\{a\}'', \{a\}')$, $a \in G$, ordered reversely (add $\perp$).

If D is a coherent algebraic cpo (eg. all finite cases), then

for $\mathsf{K}(D) \supseteq \{b_i \mid i \in I\} = B \subseteq M$ we have

$B'' = \{b \in M \mid \{\{b_i\} \mid i \in I\} \models \{b\}\}$.

Relation to Formal Concept Analysis (FCA)

	salad	starter	fish	meat	red wine	white wine	water	dessert	coffee	expensive
1			×			×		×		
2				×	×			×		
3	×		×			×		×	×	×
4		×		×	×			×	×	×
5	×	×	×				×			
6	×	×		×			×		×	
7	×	×		×	×		×	×	×	×
8				×			×		×	
9	×	×						×		

Relation to Formal Concept Analysis (FCA)

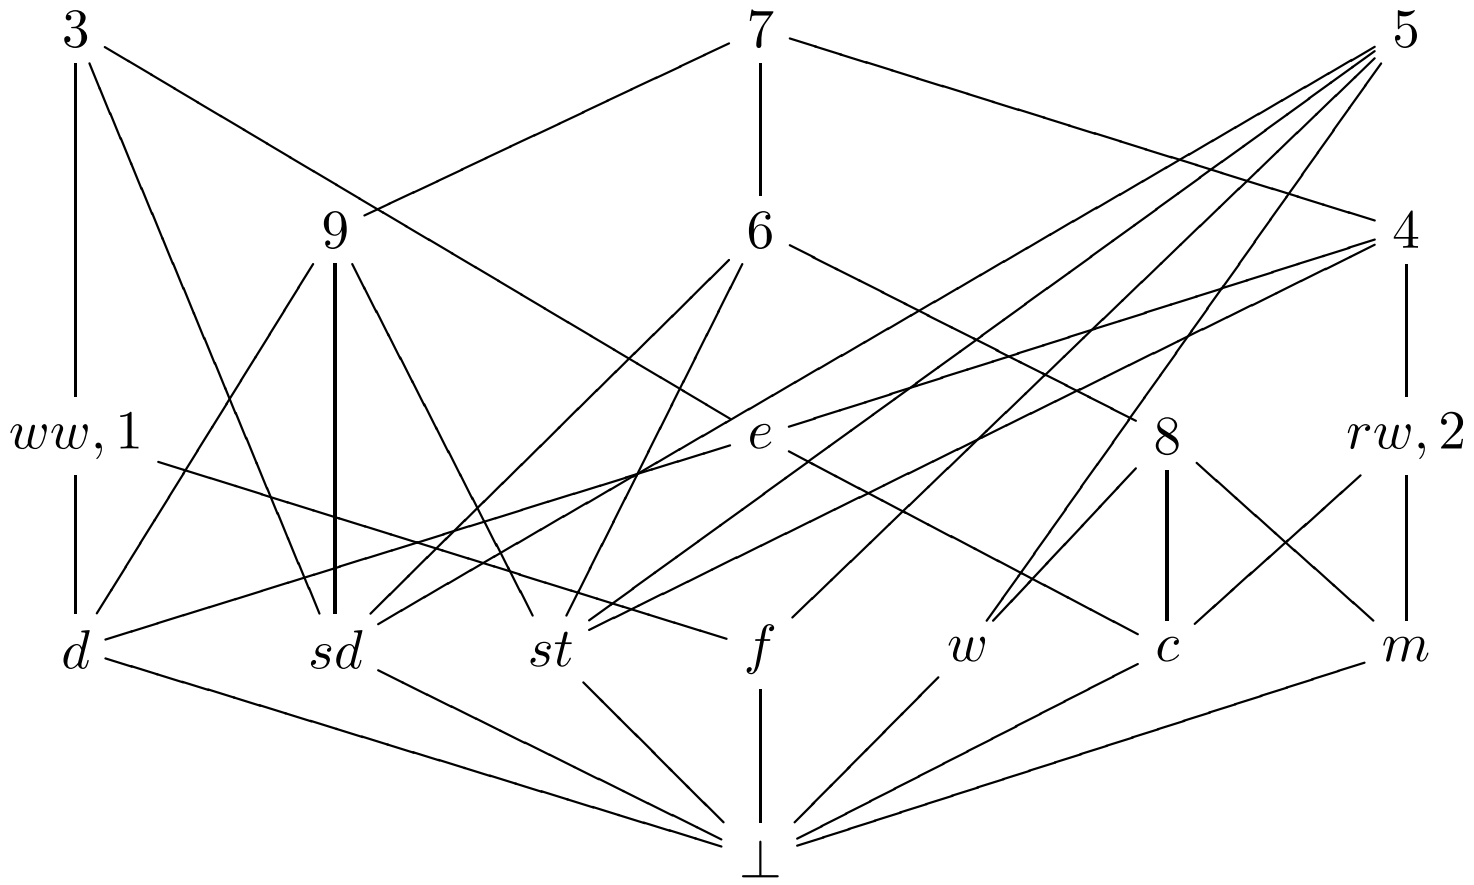

Logic programming in coherent algebraic domains

(Rounds & Zhang 2001)

Add material implication: $X \leftarrow Y$ for X, Y clauses.

$w \models P$: if $w \models Y$ for $X \leftarrow Y \in P$, then $w \models X$.

Propagation rule $\mathrm{CP}(P)$:

$$\frac{X_1 \quad \ldots \quad X_n; \quad a_i \in X_i; \quad Y \leftarrow Z \in P; \quad \mathrm{mub}\{a_1, \ldots, a_n\} \models Z}{Y \cup \bigcup_{i=1}^{n} (X_i \setminus \{a_i\})}$$

Semantic operator on theories:

$$\mathcal{T}_P(T) = \mathrm{cons}\left(\{Y \mid Y \text{ is a } \mathrm{CP}(P)\text{-consequence of } T\}\right).$$

- $\mathcal{T}_P$ is Scott continuous [RZ01].
- $\mathrm{fix}\,(\mathcal{T}_P) = \mathrm{cons}(P)$.

Additon of default negation

Extended rules: $X \leftarrow Y, \sim Z$.

P program, T theory. Define P/T:

Replace $Y, \sim Z$ by Y if $T \not\models Z$.

Remove rule if $T \models Z$.

T *answer theory* for P if $T = \mathrm{cons}(P/T) = \mathrm{fix}(\mathcal{T}_{P/T})$.

A version of default logic

Consider $\mathbb{T}^{\omega}$.

Clauses are the propositional formulae in disjunctive normal form.

Extended rules correspond to defaults.

Answer theories correspond to default extensions.

But logical consequence is not classical.

▶ On $\mathbb{T}^{\omega}$ we obtain something akin to propositional default logic.

Answer set programming

We do the same with *models*.

P program, $w \in D$. Define P/w:

Replace $Y, \sim Z$ by Y if $w \not\models Z$.

Remove rule if $w \models Z$.

w *min-answer model* for P if w is minimal with $w \models \mathrm{fix}(\mathcal{T}_{P/w})$.

Answer set programming

Consider $\mathbb{T}^\omega$.

Consider programs P with rules $X \leftarrow Y, {\sim}Z$ such that:

Y singleton clause

X, Y, Z contain only atoms in $\mathbb{T}^\omega$ or $\bot$

These programs are exactly extended disjunctive programs.

Min-answer models w correspond to *answer sets* $\{L \text{ atom} \mid w \models \{L\}\}$.

Further Work

What *is* this version of default logic?

Syntactic extensions/integrating paradigms

(FCA) applications

Decidability issues